

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 March 2006 (16.03.2006)

PCT

(10) International Publication Number
WO 2006/027637 A1

(51) International Patent Classification: **D04B 21/16**,
A01F 15/00

(21) International Application Number:
PCT/IB2004/002908

(22) International Filing Date:
7 September 2004 (07.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **TAMA PLASTIC INDUSTRY** [IL/IL]; Kibbutz Mishmar Ha'Emek, 19236 Mishmar Ha'Emek (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LIN, Ronen** [IL/IL]; Kibbutz Mishmar Ha'Emek, 19236 Mishmar Ha'Emek (IL). **LIOR, Tsafirir** [IL/IL]; Kibbutz Mishmar Ha'Emek, 19236 Mishmar Ha'Emek (IL). **PELED, Ohad** [IL/IL]; Kibbutz Mishmar Ha'Emek, 19236 Mishmar Ha'Emek (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: NETTING MATERIAL WITH REFLECTIVE OR LUMINESCENT MARKER

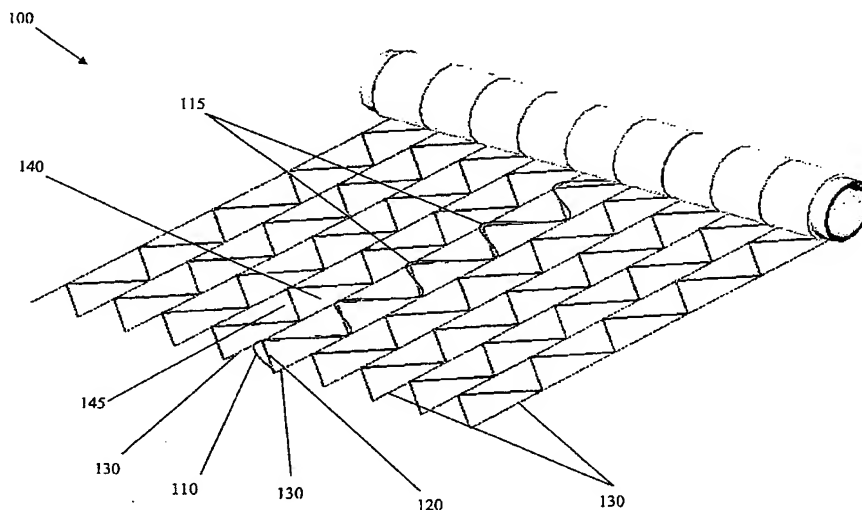

(57) Abstract: A netting material (100) includes reflective and/or luminescent markers (110) that make the netting (100) visible in low light or reduced light situations, and in certain embodiments also marks the roll end in a manner visible in low light situations. The strip (110) reflects a source of light even from a distance and even at a sharp angle, or alternatively emits light itself. The reflective or luminescent strip (110) may be incorporated into the net (100) in addition to and optionally alongside colored roll-end markers that are easily visible in daylight.

WO 2006/027637 A1

BEST AVAILABLE COPY

TITLE OF THE INVENTION**NETTING MATERIAL WITH REFLECTIVE OR LUMINESCENT MARKER****FIELD OF THE INVENTION**

5 The present invention relates to the field of packaging, and more particularly, to netting for baling agricultural produce.

BACKGROUND OF THE INVENTION

 The use of balers for baling agricultural crops into round (cylindrical)
10 bales has become increasingly common in recent years, replacing the old system of baling square bales which were secured by different types of twine or metal wire. The first round-balers also used various types of twines to secure the bale, however, over the years other types of netting have been used. The use of knitted Raschel nets has become more and more common. Raschel netting is a knitted netting and is made from polymeric
15 material. Raschel netting includes a plurality of equally spaced longitudinal ribbons known as "franzes" and a plurality of intervening zigzag ribbons known as "schusses."

 Information regarding Raschel netting, including details on its production, materials, and other aspects, can be found in U.S. Patent No. 4,569,439, U.S. Patent No. 5,104,714 and U.S. Patent No. 6,521,551. U.S. Patent No. 4,569,439 to Freye et al.
20 describes netting for wrapping a round bale of agricultural blade crops. The Freye netting eliminates prior measures for fastening of the wrapping which were previously necessary. U.S. Patent No. 5,104,714 to Lieber et al. describes an elastic netting and a method for making the same, wherein linear low density polyethylene ribbons are knitted into a Raschel net. U.S. Patent No. 6,521,551 to Mass et al. describes a knitted netting that
25 includes longitudinal polyolefin ribbons and lateral polyolefin ribbons knitted with the longitudinal polyolefin ribbons to form knitted netting. The lateral polyolefin ribbons of the knitted netting have an actual schuss length more than 110% of a calculated schuss length for the knitted netting, which prevents transverse shrinkage of the netting.

 Nets for use in round baling machines are normally supplied in rolls of
30 various diameters, typically up to 30 cm. The net is used to wrap crops with the required number of wraps around the circumference of the bale, typically two to four times. The number of bales that can be wrapped by one roll of net varies, and is determined by the length of net on the roll, the diameter of the wrapped bales, and the type of crop.

Typically, about 12 linear meters of net are required to wrap one bale. Different balers and different conditions require different measurements of net, but generally, a standard roll of net will wrap 150-300 bales.

One limitation with balers and net wrap is that only a limited amount of netting can be loaded into the designated compartment on the baler. As a result, the operator must reload the baler with a new roll of netting every time a roll is exhausted. Ideally, an operator should receive a warning well in advance, to avoid a situation where the remaining net will not be sufficient to wrap the crop being baled. In such a situation, the bale may leave the baler unwrapped or wrapped insufficiently, such that the bale may break apart and the crop be wasted.

Some balers are equipped with an electronic metering device that measures the amount of net applied to the bale. The metering device includes an electronic sensor that is associated with a free turning roller, over which the net is passed enroute to the bale. The sensing device is calibrated to give an approximation of the amount of the net that passes over it, in order to calculate when to stop feeding the net into the baler, i.e., depending upon how much net is required per bale (number of net layers on the bale). Thus the device is used as an indicator of the amount of net applied, and it can also indicate the total amount of net that has been passed over the free-turning roller. However, since this free-turning roller is exposed to the weather, and is generally dirty and/or includes debris in its bearing that can impede its free-turning ability, the existing metering may not be very reliable. Thus, the bale operator is not automatically warned that the end of the roll is approaching. Instead, the bale operator can only estimate or speculate when the end of the roll is near. Therefore, a visual indicator is still necessary.

In addition, the electronic metering is not very accurate since the length of net on each roll and the length of net used to wrap a single bale often vary. This is because the amount of material on a roll can deviate slightly from the stated manufacturer's specifications, and because the diameter of the bale itself can vary from bale to bale, requiring more or less netting than anticipated. When relying on an electronic metering device, the operator still must visually verify the quantity of net remaining for wrapping.

In light of the above problems, the market has demanded that the operator be visually warned when the roll of net is nearly exhausted. Such a solution would allow the operator to replace the exhausted roll in time, and avoid the danger of wasting crop.

Some solutions have been developed, all based on the principle of a variation in the color of the net towards the end of roll.

However, the existing roll-end markers are useful only in daylight conditions. They cannot meet the requirements of baling during reduced lighting
5 conditions, e.g., the evening or nighttime, as they are typically difficult to see in low light situations. Night baling is often done in areas with hot, dry weather, in order to ensure the presence of a minimum required percentage of humidity in the crop being baled. Also, in rainy areas, farmers may bale their crops around the clock in an attempt to bale all the available crop before expected showers that would render baling impossible.

10 An additional problem encountered when baling at night, is that as the farmer works through the field, the bales made earlier become invisible and difficult to locate in order to bring them in to cover.

Heretofore, a satisfactory solution to the above described problems has not been proposed. Accordingly, described below and in the appended claims is netting
15 incorporating markers suitable for enhancing visibility of wrapped bales in low light situations, as well as for indicating an approaching roll end when used in balers or other wrapping devices.

SUMMARY OF THE INVENTION

20 The present invention deals with the use of a reflective or luminescent strip with netting that makes the netting visible in low light or reduced light situations, and in certain embodiments extends the entire length of the netting, or marks the roll end, or both, in a manner visible in low light situations. The strip reflects a source of light even from a distance and even at a sharp angle, or alternatively emits light itself, depending on
25 the specific embodiment. The reflective or luminescent strip may be incorporated into the net in addition to and optionally alongside colored roll-end markers that are easily visible in daylight.

An object of the invention is to provide a netting material with improved visibility during low light or reduced light conditions.

30 Another object of the present inventions is to provide a netting in which longitudinal and/or substantially lateral netting ribbons have been replaced and/or supplemented with reflective or luminescent strip.

A still further object of the present invention is to provide a netting that includes two or more substantially longitudinal netting ribbons, arranged substantially parallel to a longitudinal axis of the netting material, the longitudinal netting ribbons traversing a length of the netting material, one or more substantially transverse netting ribbons arranged substantially transverse to the longitudinal axis of the netting material, and a reflective or luminescent strip indicator arranged longitudinally on the netting material continuously from one end of the netting material to the other end or to a point located at a predetermined distance from that one end, the reflective indicator acting as a visual signal to user that an end of the netting material is approaching.

A further object is to provide a netting in which at least one or more of the longitudinal ribbons or lateral ribbons has been replaced or supplemented with the reflective or luminescent strip marker.

A still further object of the invention is to provide methods for providing a reflective netting and methods for wrapping a bale including supplying a baler with a netting material with reflective markings to provide low light or reduced light visibility, and wrapping the bale in the same netting using a baling machine.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates an isometric view of a first embodiment of the present invention;

Figure 2 illustrates in detail, one option for forming loops in the longitudinal franzes of Raschel netting;

Figure 3 illustrates a top view of a first embodiment of the present invention;

Figures 4 and 5 illustrate a second embodiment of the present invention, including a partially unrolled Raschel netting material with an added reflective strip alongside a longitudinal franze;

Figure 6 illustrates a third embodiment of the present invention including reflective strips incorporated into the netting material alongside both the longitudinal franzes and zigzag schusses;

Figure 7 illustrates a fourth embodiment of the present invention in which a reflective strip has been incorporated into the netting material to replace a single schuss;

Figure 8 illustrates a wrapped bale, wrapped in a representation of a fifth embodiment of the netting material, depicted as if in low light conditions with a distant light being shone on the wrapped bale;

Figure 9 is a photograph of the netting according to the fifth embodiment
5 of the present invention taken with a flash;

Figure 10 is a nighttime photograph of distant bales wrapped in the claimed netting material, where a reflective strip is used in a zigzag fashion; and

Figure 11 is a photograph of the netting according to the fifth embodiment of the present invention taken without use of a flash.

10

DETAILED DESCRIPTION OF THE DRAWINGS

The present invention utilizes at least one reflective or luminescent strip which is incorporated into a netting material. Although the hereinafter described non-limiting embodiments focus on Raschel knitted netting, the inventive reflective or
15 luminescent marker strips can also be used with other netting materials that are used to bale crops. U.S. Patent Nos. 5,104,714 and 6,521,551, which are each directed to Raschel knitted netting, are incorporated herein by reference.

In some embodiments described herein, the reflective or luminescent strip is added to the net alongside a least one of the longitudinal ribbons or at least one of the
20 substantially transverse or lateral ribbons or both. In the case of Raschel netting, the longitudinal and substantially lateral ribbons are respectively referred to as franzes and schusses.

In other embodiments described hereinafter, at least one strip is incorporated into the netting to replace the longitudinal and/or transverse ribbons.
25 Alternatively, some ribbons can be replaced with the strips, while the reflective/luminescent strips are added alongside others. The reflective strips can extend the entire length of the netting or can extend for a predetermined part of the netting on a roll. Additionally, the reflective or luminescent strips may themselves have a predetermined color that is visible during the day and/or the night.

30 With Raschel netting, embodiments in which the lateral ribbon is replaced are preferable to the others for at least two reasons. First, replacing a longitudinal strip with a reflective strip may weaken the net's overall strength, whereas the lateral ribbons have a minimal effect on the overall strength of the net. Secondly, a reflective lateral

strip is more visible from a distance than the longitudinal ribbons because it creates a reflecting area that is as wide as the space between two adjacent longitudinal franzes, as lateral ribbons zigzag across that space.

Because the strip tends to twist while being knitted into the roll of net and
5 while the net is being used, a preferred type of strip is reflective or luminescent on both faces.

Depending on the specific embodiment, the reflective/luminescent strip can be incorporated into the net for a predetermined length, providing a warning for the last 100 linear meters of net, an amount sufficient for wrapping about 8 bales, or any
10 other length that could be desired.

Since a bale itself cannot usually be seen at night unless the operator drives by it, at least one reflective/luminescent marker may be inserted along the entire length of the net in order to increase low- or reduced- light visibility of every bale that may be on a field. For example, reflective/luminescent markers can be located adjacent
15 to the lateral side(s) of the netting, adjacent to the center, or any location.

In a test performed by applicants, it was found that when a tractor's lights fall on a bale having a reflective strip, the bale can be seen even from a distance of 50 meters, and in some conditions even from a distance of 100 meters. In such conditions, the operator may notice the bale even if it is across a field.

Alternatively, netting can be provided with at least one
20 reflective/luminescent marker along the entire length of the net, with a second reflective/luminescent marker only at the end of the net serving as a roll-end marker.

The invention will now be described with reference to the drawing figures. Figures 1 and 3 illustrate a first embodiment of the present invention in isometric and top views, respectively. Figures 1 and 3 show a partially unrolled Raschel netting material
25 100, in which a reflective strip 110 has been added to the netting 100. In this embodiment, the reflective strip 110 is inserted into the net adjacent to one of the zigzag schusses 120. The longitudinal franzes 130 are shown. The reflective strip 110 can be threaded into the netting material such that at its apexes 115, it only passes through the
30 apertures 140, 145 defined by the schusses and franzes, merely passing around the franze 130 at that point. Alternatively, the reflective strip 110 may be threaded or knitted into the netting material 100 in such a manner that it passes through apertures 230, 250 (described below in connection with Figure 2) which are an integral part of the

longitudinal franzes 130. Although Figures 1 and 3 illustrate the use of a single reflective strip 110, more than one reflective strip, at any desired position across the netting can be used.

Figure 2 illustrates in more detail, how the loops 230, 250 in the longitudinal franzes 130 of Raschel netting 100 are formed. A single strand of material 210 is used to form the entire franze. Since only a segment is shown in Figure 2, each end of the segment is shown as terminating in a single strand 210 and in a loop 220 from an adjacent segment, but these loops 220 occur at regular intervals throughout the length of the franze 130, and create links 240. These links 240 separate adjacent apertures 230, and provide a secure location through which to loop schusses 120, preventing the schusses from sliding along the franzes 130. In this embodiment, the schuss 120 passes through the apertures 230. In a similar manner, the reflective strip 110 may be secured to the franzes 130. As can be seen, it would also be possible to utilize apertures 250 to secure the schuss 120 or reflective strip 110.

Still referring to Figures 1-3, since the purpose of using the reflective strip 110 is precisely for that reason, that is, for reflecting light, the strength of the reflective strip is not important if it is included in the netting material 100 in an accessory capacity. Further, if included alongside schusses 120, the strength is even less important, since most internal stresses in the netting material are experienced as tension in the longitudinal franzes 130. Naturally, in either instance, if the reflective strip 110 is used as a substitute for the regular material of either the schusses 120 or franzes 130 (as described in more detail below), then the strength of the material should be appropriate for the intended purpose. However, some cost savings are realized over a situation where the reflective material 110 is "doubled up" with a franze 120 and/or a schuss 130.

Figures 4 and 5 illustrate a second embodiment of the present invention. As shown, a partially unrolled Raschel netting material 400, includes an added reflective strip 112 alongside a longitudinal franze 130. The reflective strip 112 in this embodiment may be threaded along and around the franze 130 through apertures 140 and 145, or may be threaded through or knitted into the apertures 230 or 250 during the manufacture of the net. As with the embodiments of Figures 1-3, more than one franze ribbon may be replaced and/or supplemented with a reflective strip.

In both first and second embodiments illustrated in Figures 1 - 3 and 4 - 5, as well as in the below-described embodiments, the reflective strip 110 or 112 tends to

twist as it runs the length of the netting material 100, 400. As such, it is often preferable to incorporate a reflective material that has reflective surfaces on both sides (if the reflective strip is in the form of a flat ribbon), or all sides (if the reflective strip is in the form of a string, rope or the like).

5 Figure 6 illustrates a third embodiment of the present invention in which reflective strips 110 and 112 have been incorporated into the netting material 600 alongside both the longitudinal franzes 130 and zigzag schusses 120. The manners in which the reflective strips 110 and 112 may be secured to the netting material 600 are the same as described in the first and second embodiments, respectively.

10 However, it is not necessary for both the schuss reflective strip 110 and the franze reflective strip 112 to be inserted into the netting material in the same manner. For example, one reflective strip 110 or 112 can be inserted by threading into already manufactured net 600, and the other reflective strip 112 can be inserted by knitting directly into the netting material 600.

15 Figure 7 illustrates a fourth embodiment of the present invention in which a reflective strip 110 has been incorporated into the netting material 700 to replace a single schuss 120. When used as a replacement for a schuss 120, that is, as reflective schuss 710, the reflective material 110 will be knitted into the netting material 700 during manufacture. While a single schuss ribbon has been replaced with a reflective schuss
20 ribbon, it is also possible to replace more than one, or even all the schuss ribbons with reflective schuss ribbons. It is also possible to replace the franze ribbons in a similar manner. The entire length of the franze or schuss ribbons can also be reflective.

 Figure 8 illustrates a wrapped bale 800, wrapped in a representation of a fifth embodiment of the netting material 860, depicted as if in low light conditions with a
25 distant light being shone on the wrapped bale 800. This embodiment of the netting material 860 includes the reflective schuss 710 of the fourth embodiment in combination with colored, non-reflective franzes 830 arranged together in an indicator section 850. Such non-reflective colored franzes 830 facilitate viewing of the indicator in bright light, and may be any color, but are often red. Where standard contrasting materials are easily
30 noticed in daylight, and difficult to see at night, the reflective strip 110 is easily noticed at night when light is reflected from the strip 110, even from a large distance. However, standard reflective materials usually appear to be silver or gray in daylight and brilliantly white or silver at night, when illuminated. Accordingly, it is sometimes difficult to see

reflective materials in the daytime, and for that reason, contrasting color materials, such as colored franzes 830 are used.

As an alternative to this approach, a reflective material having a color can be utilized. For example, rather than appearing silver or gray in daylight, a colored
5 reflective material can be manufactured to appear red during the day and still be reflective at night.

Figure 9 is a photograph of the netting 860 according to the fifth embodiment of the present invention taken with a flash. In this embodiment, rather than simply utilizing the reflective schuss 710, the reflective strip 110 is included adjacent to
10 the standard schuss 120, as in the first embodiment shown in Figures 1 and 3. In this version of the netting material 860, four colored franzes 830 and one reflective strip 110 are provided. As shown in Figures 8 and 9, these indicator sections 850, 950 are centrally located relative to the width of the net 860, however this placement is not required, and the indicator sections 850, 860 may be placed anywhere: near one edge or along both
15 edges, for example.

Figure 10 is a nighttime photograph of distant bales wrapped in the claimed netting material, where a reflective strip 110 is used in a zigzag fashion, as shown in Figures 1, 3, 7, 8 and 9. As seen in this photograph, which was taken using a camera flash, the nearest bales 1010, 1020, 1030 and 1040 are easily located due to the
20 bright reflections experienced from the reflective strip 110. However, one can also see bales further from the photographer 1050 and 1060, which although twice as far from the photographer, still reflect enough light that they are visible, although the reflections are somewhat more dim.

Figure 11 is a photograph of the netting 860 according to the fifth
25 embodiment of the present invention taken without use of a flash. As with the netting 860 in Figure 9, in this embodiment, rather than simply utilizing the reflective schuss 710, the reflective strip 110 is included adjacent to the standard schuss 120, also as in the first embodiment shown in Figures 1 and 3. In this version of the netting material 860, four colored franzes 830 and one reflective strip 110 are provided. In comparison with Figure
30 9, a photograph of the same piece of netting but with use of a flash, the need for a secondary indicator (such as colored franzes 830) in daylight is easily seen. The photograph of Figure 11 (without a flash), does not show great contrast between the reflective strip 110 and the rest of the netting material 860. With a flash (Figure 9),

however, the distinction is clear. Accordingly, it may be desirable in some instances to use both reflective strips 110 and colored ribbons in colored franzes or schusses.

In all embodiments, the schusses 120 and franzes 130, whether reflective or non-reflective, and strips 110, 112 can be manufactured out of many materials, including, but not limited to polymeric materials, such as polypropylene, polyethylene, polyester, polyethylene terephthalate, nylon, polyvinyl chloride. Also, the thread, ribbon or strips comprising the schusses 120, franzes 130, and reflective strips 110, 112 can be monofilament or multifilament, woven, twisted or braided, and may alternatively be called string, tape, yarn or the like.

In many embodiments, reflective and/or colored elements are provided as an indicator for approximately the last 100 linear meters of net, which is enough material for approximately 8 bales. As an alternative, the roll-end indicator may have additional features, such as color or pattern-changing as the roll end approaches. For example, the first roll end indicator seen (e.g., 100-80 meters from the end of the net) can have a yellow tinge, which can change as netting continues to be dispensed to orange and/or red as the net end approaches. In such instance, the operator would be aware that the net end is approaching when he sees yellow, but would know that by the time red is seen, there is only enough netting material for at most one more bale. As such, material need not be wasted by discarding un-used net. This general concept of the roll-end indicator can be applied to non-reflective indicators as well, where the color changes as the roll end approaches. Further, this variation can also be used in combination with a continuous reflective marker throughout the length of the net.

When wound on a spool or core, the roll end is the portion of net closest to the core. Accordingly, during manufacture, this section can be prepared first and wound onto the core, with the remainder of the netting material being manufactured in a conventional manner and wound on the core over the reflective portions.

When a reflective material is used as the mark, the reflective material has a coefficient of retroreflection (R_A), in the range of 30 to 700, for example, 250. The tensile strength of the marker, as discussed above, depends on whether it replaces a franze or schuss, or whether it is used in addition to the franze or schuss ribbon as discussed herein. Marker tensile strengths on the order of 140-800 grams are contemplated. Similarly, elongation capability of the marker depends on whether the marker is a replacement for a franze or schuss or supplements the franze or schuss, as discussed

herein. Materials used as a marker can have elongation between 0% and 200%, for example, 10%, 20%, 30%, 40%, 50%, 60% etc.. In addition, the marker material can have the same or different elongation properties that those of the franze or schuss ribbon that it replaces or supplements.. A reflective material can include polymeric material that is made reflective by the addition of refractive particles, such as very small beads formed from glass or polymeric materials.

Further, the reflective material may have any suitable width such as between 1/69 inch and 10 inches, for example 1/69 inch, 1/32 inch or 1/23 inch.

As discussed herein netting material, whether of the triangular pattern type, e.g., Raschel netting, or any other pattern, quadrilateral or otherwise can incorporate the reflective indicator throughout the entire length of the netting material so that any bale wrapped with the material is visible at night.

In other embodiments the subject netting material incorporates a first reflective indicator throughout the entire length of the netting material, and a second reflective indicator at the end of the netting material. In this case, the first reflective indicator allows any bale wrapped with the material to be visible at night, while the second indicator allows an operator to be alerted to an approaching end of the netting material. In such a case, the first and second reflective indicators would necessarily be distinguishable. Such distinction can be achieved by providing a separate or different pattern and/or color for each indicator, or even simply placing the reflective indicators at different positions on the net. For example, a first indicator can be arranged in the middle of the net, with the second indicator being arranged toward one edge of the net, or vice versa. Of course, this alternative embodiment may also include colored netting elements to alert an operator to an approaching roll end in daylight.

A further alternate means of distinguishing between a continuous (throughout the entire net length) indicator and a roll end indicator incorporates a single strand of indicator material. Such indicator itself can vary in color or pattern throughout its length to indicate whether the end of netting material is approaching. For example, the indicator material may be solid for a majority of its length, but in the region where roll-end indication is desired, the reflectivity of the reflective strand can be varied. That is, what is otherwise a "solid" reflective strand can become an intermittently reflective strand. This can be achieved simply by obscuring intermittent portions of the reflective strand with opaque paint or the like.

While netting may be initially manufactured to incorporate a reflective indicator, such indicator may be incorporated into a roll that has already been manufactured. If an existing roll of netting is to be modified, it is possible to incorporate a reflective marker into the net, and wind the net onto another spool or core.

5 While the above embodiments include a reflective and/or colored roll-end indicator that is integrated into the netting material in a substantially longitudinal direction, it is possible to include markers that are arranged in a substantially transverse manner. For example, rather than incorporating a zigzag reflective schuss, segments of reflective strips along the width of the netting can be inserted intermittently along the
10 length of the netting, perpendicular to a longitudinal axis of the netting material. This alternative means of reflective indication can communicate information to an operator in a variety of manners. For example, different color reflective materials can be used as the roll end approaches and/or the frequency of transverse reflective indicators can be increased, placed adjacent to each other in pairs, threes, and so on.

15 A further variation of the subject reflective and/or colored indicators provides different colored and/or patterned indicators for different crops. As a result, if stored in a dark barn or in a field, a baled crop can be quickly and easily identified.

 It is to be understood that the term "reflective" has been used above to describe the type of marker preferred for the present invention, that a luminescent marker
20 may be substituted in its place. Such luminescent markers may include so-called "glow in the dark" materials. Further materials having a fluorescent color that is easily viewable in poor lighting conditions may also be used.

 It is to be understood that other embodiments utilizing the subject reflective markers are possible and though not specifically set forth herein would still be
25 in keeping with the spirit of the invention.

WE CLAIM:

1. A netting comprising longitudinal ribbons and interconnecting transverse ribbons, said netting including at least one reflective indicator extending from an end of the netting along a longitudinal direction of the netting.
5
2. The netting of claim 1, wherein the at least one reflective indicator is at least one of the longitudinal ribbons.
3. The netting of claim 1, wherein the at least one reflective indicator
10 is at least one of the transverse ribbons.
4. The netting of claim 1, wherein the at least one reflective indicator is a reflective indicator strip arranged adjacent to at least one of the longitudinal ribbons.
- 15 5. The netting of claim 4, wherein the reflective indicator strip is threaded through one of the longitudinal ribbons.
6. The netting of claim 1, wherein the at least one reflective indicator is a reflective indicator strip arranged adjacent to at least
20 one of the transverse ribbons.
7. The netting of claim 6, wherein the reflective indicator strip is threaded through one of the longitudinal ribbons.
- 25 8. The netting of claim 1, wherein a plurality of openings are formed from the longitudinal ribbons and the interconnecting transverse ribbons.
9. The netting of claim 8, wherein the at least one reflective indicator is a reflective indicator strip arranged adjacent to one of the longitudinal ribbons and
30 extends through the openings.

10. The netting of claim 8, wherein the at least one reflective indicator is a reflective indicator strip arranged adjacent to one of the transverse ribbons and extends through the openings
- 5 11. The netting of claim 1, wherein the at least one reflective indicator comprises at least two different reflective indicators, one of which is at least one of the longitudinal ribbons, and the other of which is at least one of the transverse ribbons.
- 10 12. The netting of claim 1, wherein the at least one reflective indicator extends over the entire length of the netting.
13. The netting of claim 1, wherein the at least one reflective indicator extends over a part of the netting length.
- 15 14. The netting of claim 4, wherein the at least one reflective indicator strip extends over the entire length of the netting.
- 15 15. The netting of claim 6, wherein the at least one reflective indicator strip extends over a part of the netting length.
- 20 16. The netting according to claim 2, wherein a plurality of the longitudinal ribbons are reflective.
- 25 17. The netting according to claim 3, wherein a plurality of the transverse ribbons are reflective.
- 30 18. The netting of any one of claim 1, wherein the netting is knitted netting and the interconnecting transverse ribbons are schuss ribbons that zig-zag laterally between adjacent longitudinal franze ribbons.
19. A netting comprising:
longitudinal ribbons and interconnecting transverse ribbons; and
at least one reflective indicator which is in strip form.

20. The netting of claim 19, wherein the at least one reflective indicator strip is arranged adjacent to one of the longitudinal ribbons.

5 21. The netting of claim 20, wherein the at least one reflective indicator strip is threaded through one of the longitudinal ribbons.

22. The netting of claim 19, wherein the at least one reflective indicator strip arranged adjacent to one of the transverse ribbons.

10

23. The netting of claim 22, wherein the at least one reflective indicator strip is threaded through one of the longitudinal ribbons.

24. The netting of claim 19, wherein a plurality of openings are formed
15 from the longitudinal ribbons and the interconnecting transverse ribbons.

25. The netting of claim 24, wherein the at least one reflective indicator strip is arranged adjacent to one of the longitudinal ribbons and extends through the openings.

20

26. The netting of claim 24, wherein the at least one reflective indicator strip is arranged adjacent to one of the transverse ribbons and extends through the openings.

25 27. The netting of claim 19, wherein the at least one reflective indicator strip extends over the entire length of the netting.

28. The netting of claim 19, wherein the at least one indicator strip extends over a part of the netting length.

30

29. The netting according to claim 19, wherein at least one of the longitudinal ribbons and/or at least one the transverse ribbons is reflective.

30. The netting according to claim 29, wherein a plurality of the longitudinal ribbons and/or a plurality of the transverse ribbons are reflective.

5 31. The netting of claim 19, wherein the netting is knitted netting and the interconnecting transverse ribbons are schuss ribbons that zig-zag laterally between adjacent longitudinal franze ribbons.

10 32. The netting of claim 19, wherein the at least one reflective indicator strip is located continuously between an end of the netting and a point spaced a predetermined distance from the end, thereby acting as a visual signal to a user that an end of the netting is approaching.

15 33. A netting according to claim 1 or claim 19, wherein the reflective indicator has first and second faces and comprises reflective material on both faces

34. The netting according to claim 1 or claim 19, wherein the reflective indicator has first and second faces and comprises reflective material only on one face.

20 35. The netting according to claim 1 or claim 19, wherein the reflective indicator comprises a polymeric material.

36. The according to claim 1 or claim 19, wherein a substrate of the reflective indicator is made reflective by the addition of refractive particles.

25 37. The according to claim 36, wherein the refractive particles are very small glass beads.

30 38. A roll of netting comprising, a length of netting having longitudinal ribbons and interconnecting transverse ribbons, and at least one reflective indicator extending over at least a part of the length of the netting.

39. The roll of netting of claim 38, wherein the at least one reflective indicator extends over the entire length of the netting.

40. The roll of netting of claim 38, wherein the at least one reflective indicator extends over only a part of the netting length, and acts as a visual signal to a user that an end of the netting is approaching.

5

41. A roll of netting comprising the netting according to any one of claims 1-33.

42. A round bale wrapped about its circumference with the netting of any one of claims 1-33.

10

43. A round bale wrapped about its circumference with Raschel netting, the Raschel knitted netting having substantially longitudinal franzes and interconnecting zigzag schusses, the Raschel netting having a reflective strip adjacent to at least one of the longitudinal franzes, at least one of the interconnecting zigzag schusses or both.

15

44. A wrapped bale according to claim 43, wherein the at least one reflective indicator strip extends along the entire length of the wrapped netting.

20

45. A wrapped bale according to claim 43, wherein the at least one reflective indicator strip extends along only a part of the length of the wrapped netting.

46. A round bale wrapped about its circumference with Raschel netting, the Raschel knitted netting having substantially longitudinal franzes and interconnecting zigzag schusses, the Raschel netting having a reflective strip in place of at least one of the longitudinal franzes, for the portion of the netting where the reflective indicator strip is present.

25

47. A round bale wrapped about its circumference with Raschel netting, the Raschel knitted netting having substantially longitudinal franzes and interconnecting zigzag schusses, the Raschel netting having a reflective strip in place of at

30

least one of said zigzag schusses, for the portion of the netting where the reflective indicator strip is present.

48. A round bale wrapped about its circumference with Raschel
5 netting, the Raschel knitted netting having substantially longitudinal franzes and
interconnecting zigzag schusses, at least one of the longitudinal franzes and/or zigzag
schusses being reflective and having at least one reflective strip in addition to the
longitudinal franzes and zigzag schusses.

10 49. A netting material comprising:
a plurality of substantially longitudinal netting ribbons, arranged
substantially parallel to a longitudinal axis of the netting material, the longitudinal netting
ribbons traversing a length of the netting material;
a plurality of substantially transverse netting ribbons, arranged
15 substantially transversely to the longitudinal axis of the netting material; and
a reflective indicator arranged longitudinally on the netting material
continuously from one end of the netting material to a point located at a predetermined
distance from said one end, the reflective indicator acting as a visual signal to a user that
an end of the netting material is approaching.

20 50. The netting material of claim 49, wherein the reflective indicator is
applied to the netting material in a substantially liquid form.

51. The netting material of claim 49, wherein the reflective indicator is
25 in the form of a tape applied to a surface of the netting material.

52. The netting according to claim 19, wherein the at least one
reflective indicator strip includes first and second reflective indicator strips arranged on
the netting material in different patterns to facilitate distinction between the indicators.

30 53. The netting material of claim 19, wherein the at least one reflective
indicator strip includes first and second reflective indicator strips arranged on the netting

in different locations relative to a center line of the netting material to facilitate distinction between the indicators.

54. The netting according to claims 1 or 19, wherein the at least one
5 indicator includes first and second reflective indicators of different colors to facilitate distinction between the indicators.

55. A method of wrapping a bale of agricultural produce in a baler
comprising:
10 supplying a baling machine with a roll of netting having:
a plurality of substantially longitudinal netting ribbons, arranged
substantially parallel to a longitudinal axis of the netting material, the longitudinal netting
ribbons traversing a length of the netting material;
a plurality of substantially transverse netting ribbons, arranged
15 substantially transversely to the longitudinal axis of the netting material; and
a reflective indicator arranged longitudinally on the netting material
continuously from one end of the netting material to a point located at a predetermined
distance from said one end, the reflective indicator alerting a user that an end of the
netting material is approaching; and
20 wrapping said bale in said netting using said baling machine.

56. A method of wrapping a bale of agricultural produce in a baler
comprising:
supplying a baling machine with a roll of netting having:
25 a plurality of substantially longitudinal netting ribbons, arranged
substantially parallel to a longitudinal axis of the netting material, the longitudinal netting
ribbons traversing a length of the netting material;
a plurality of substantially transverse netting ribbons, arranged
substantially transversely to the longitudinal axis of the netting material; and
30 a reflective material arranged longitudinally on the netting material
continuously from one end of the netting material to a point located at a predetermined
distance from said one end; and

wrapping said bale in said netting using said baling machine, said reflective material adapted to illuminate the ends of said wrapped bale in reduced natural light environments.

5 57. The method according to claim 56, wherein the netting provided to the baler also includes reflective indicators strips to identify the end of the netting roll.

 58. A method of providing a reflective netting, comprising:
 (a) providing a netting having longitudinal ribbons and lateral ribbons
10 that zig-zag between adjacent lateral ribbons and form a series of triangular openings; and
 (b) arranging at least one reflective indicator strip adjacent at least one of the longitudinal and/or lateral ribbons.

 59. The method of claim 58, wherein the netting has length and the at
15 least one reflective indicator is threaded through the series of triangular openings along at least a portion of said netting length.

 60. The method of claim 59, wherein the netting has length and the at
 least one reflective indicator extends through loops in the longitudinal ribbons along at
20 least a portion of said netting length.

 61. The method of claim 60, wherein the at least a portion of the netting length is the entire length of the netting.

25 62. The method of claim 60, wherein the at least a portion of the netting length is less than the entire length of the netting.

 63. A method of providing a netting with a reflective indicator comprising:
 (a) providing a first roll of netting having longitudinal and
30 interconnecting lateral ribbons;
 (b) incorporating at least one reflective indicator to a predetermined length of the outermost portion of said first roll of netting; and

(c) rewinding the netting from said first roll to form a second roll, such that the outermost portion of netting of the first roll becomes the innermost portion of netting on the second roll.

5 64. The method of claim 63, wherein the at least one reflective indicator is incorporated by applying a reflective material to at least one of said longitudinal and lateral ribbons.

10 65. A roll of netting produced according to the method of any one of claims 58 or 64.


15 66. A reflective knitted netting comprising longitudinal ribbons and interconnected transverse ribbons, said netting including at least one reflective indicator having a retroreflection value of at least 30, said reflective indicator identifying at least one of an approaching end of the knitted netting and a boundary of the knitted netting.

 67. A roll of netting comprising the knitted netting according to claim 66.

20 68. A bale wrapped about its circumference with the knitted netting according to claim 66.

25 69. A reflective knitted netting comprising longitudinal ribbons and interconnected transverse ribbons, said netting including at least one reflective indicator with a retroreflection of sufficient value to permit the netting to be identified at night at distances of at least about 50 meters upon illumination by artificial light, said reflective indicator identifying at least one of an approaching end of the knitted netting and a boundary of the knitted netting.

FIGURE 1

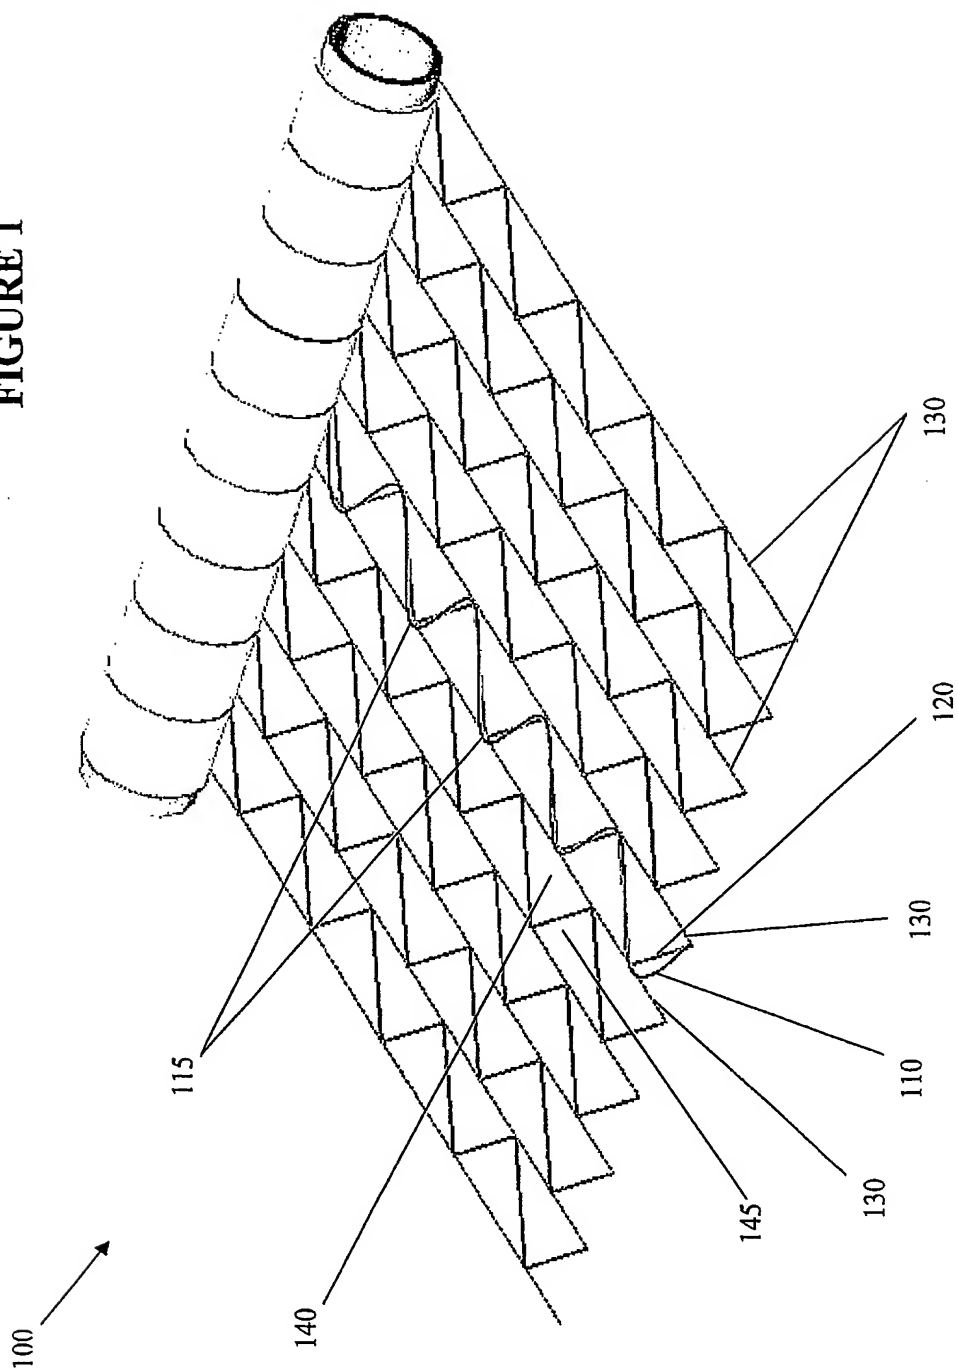

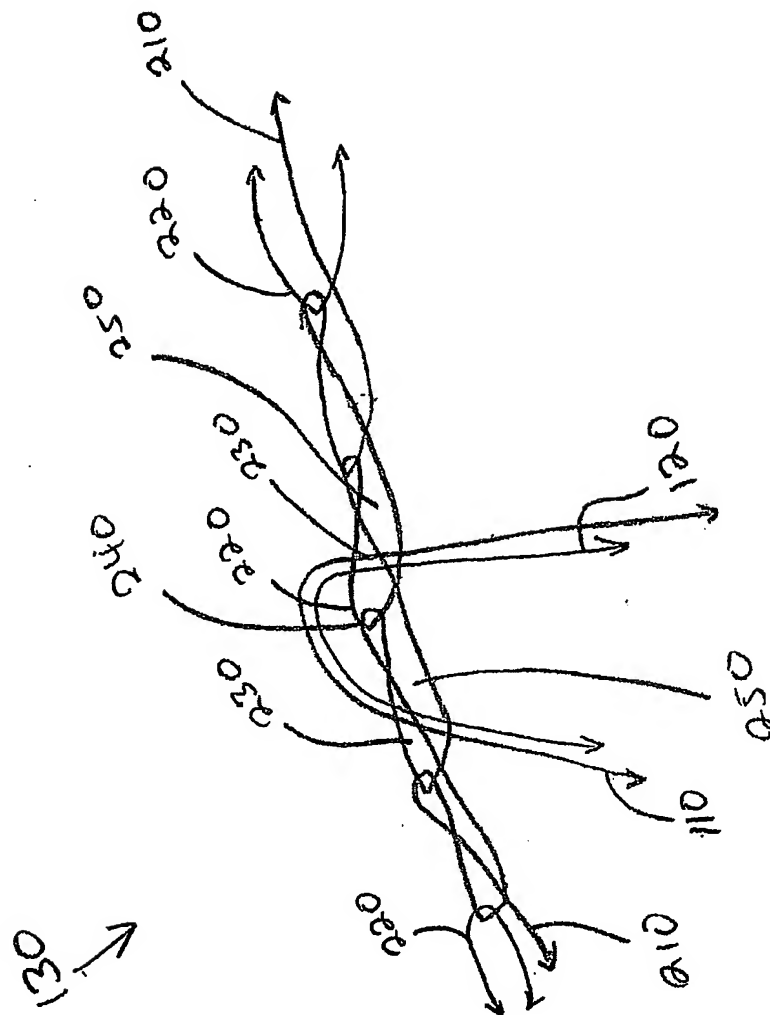


Figure 2


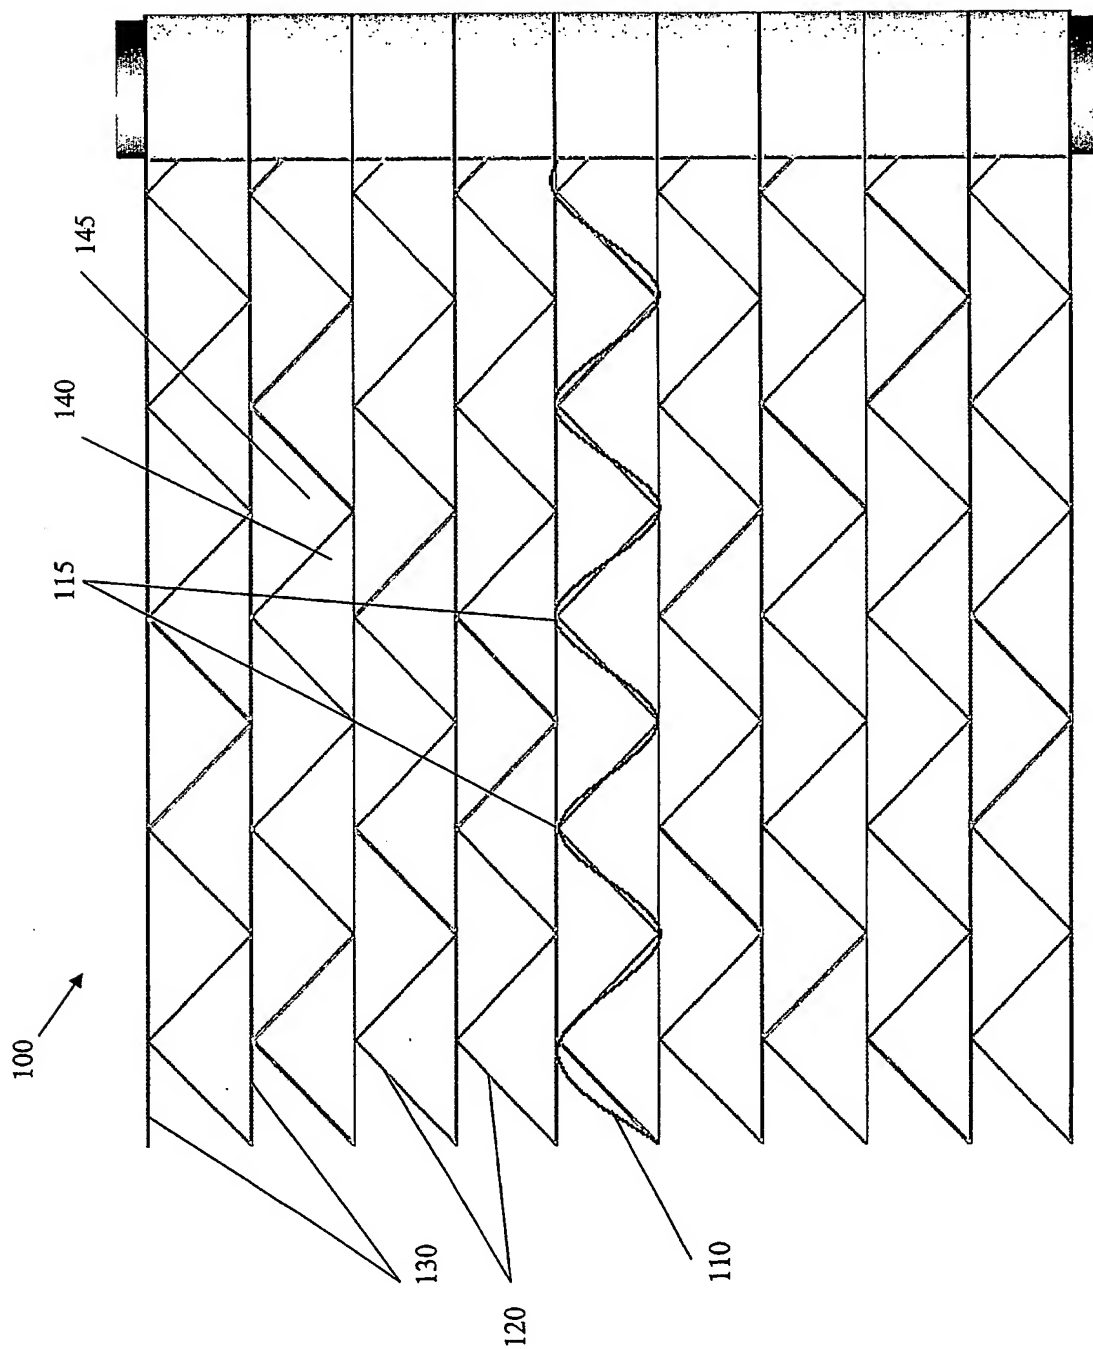


FIGURE 3

4/11

FIGURE 4

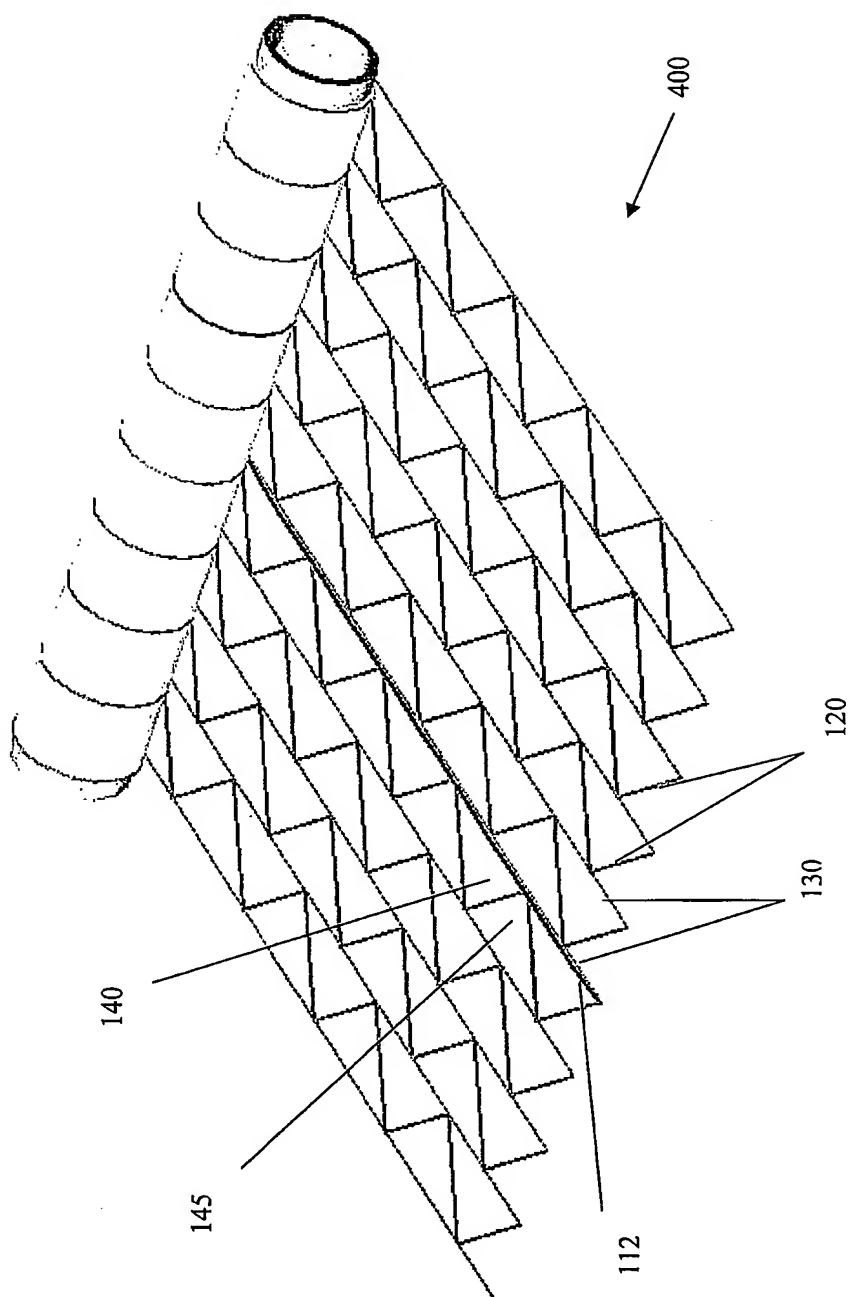

5/11

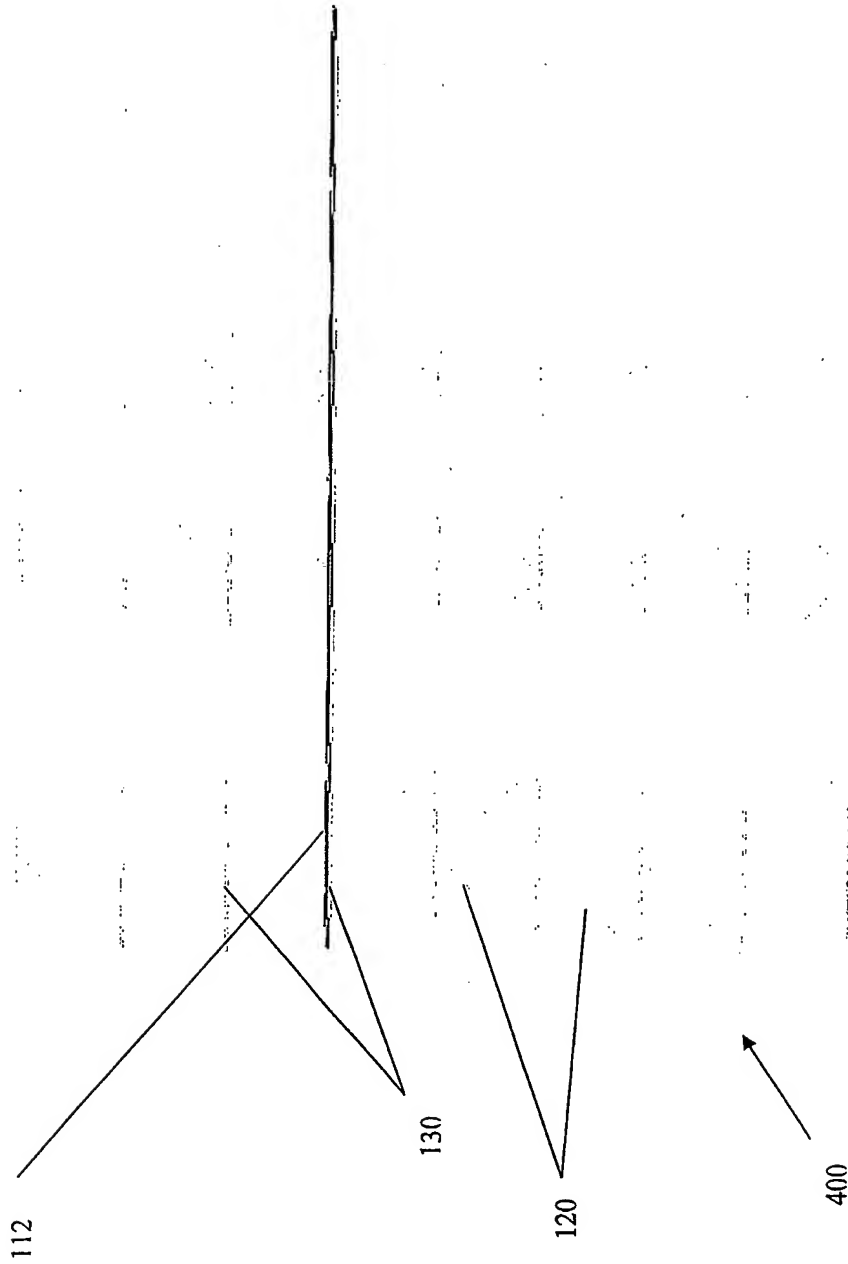


FIGURE 5

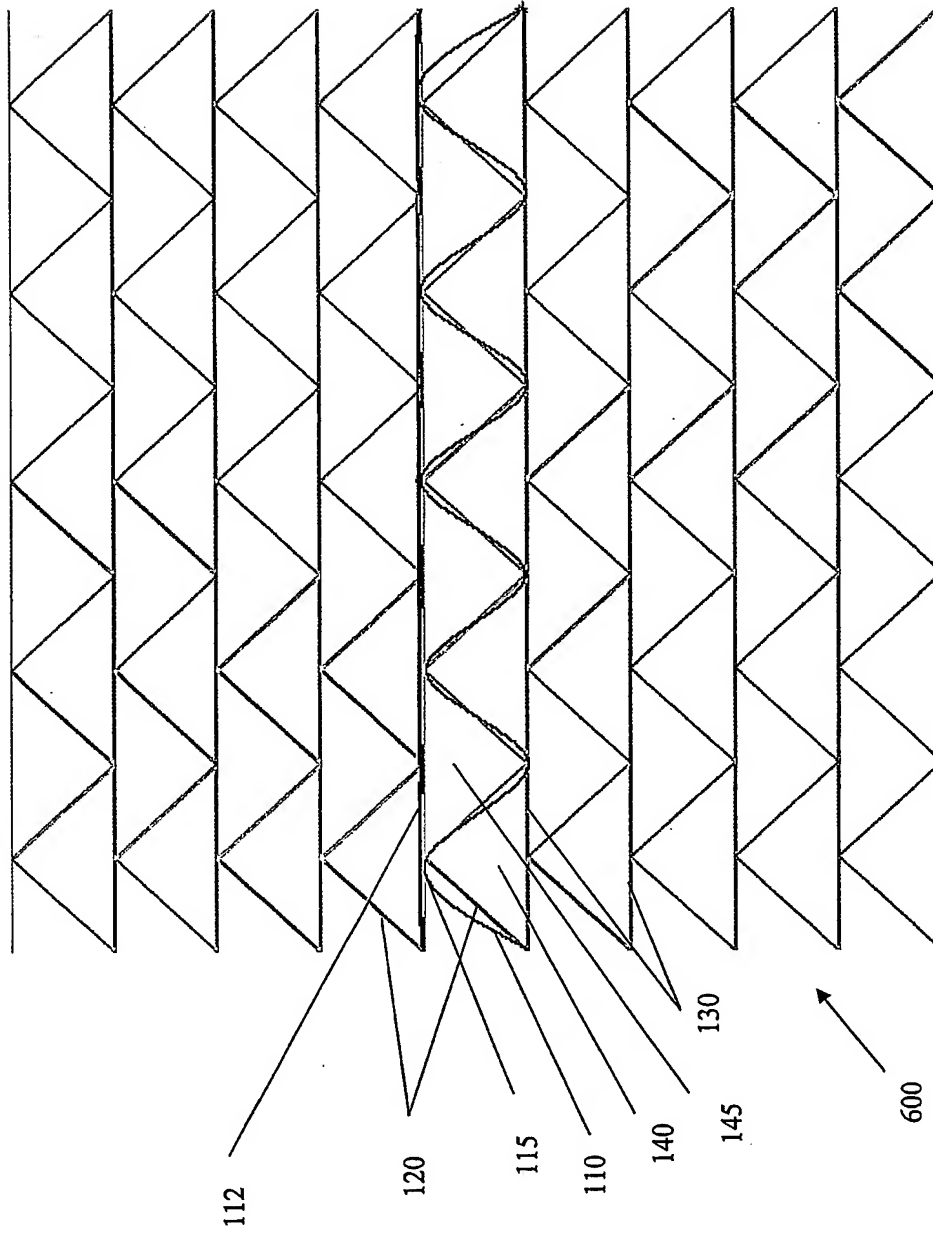


FIGURE 6

7/11


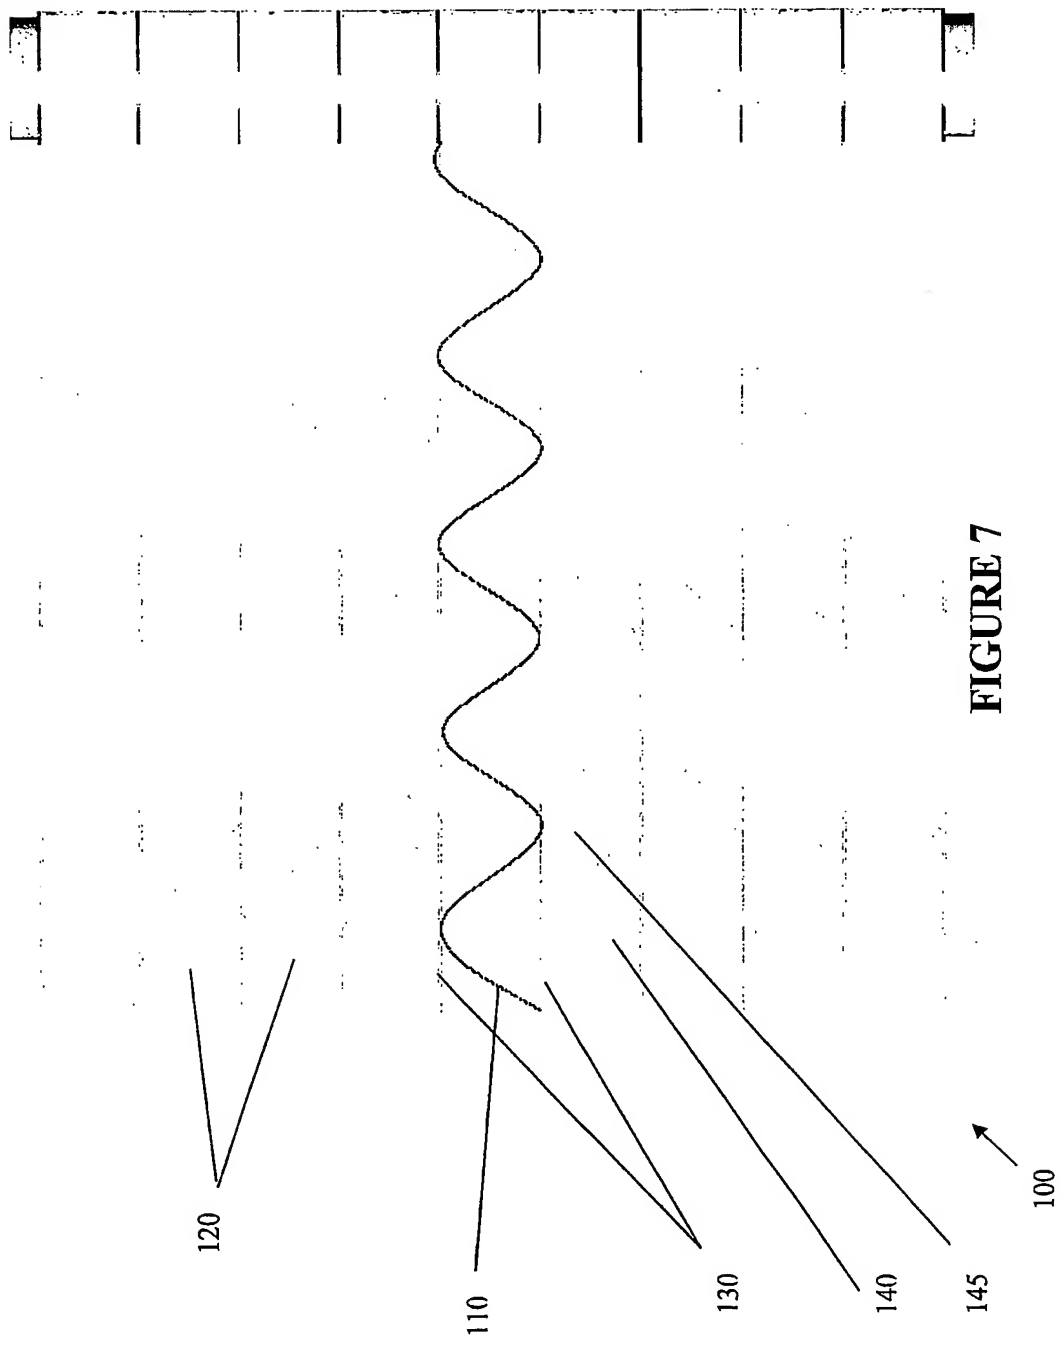


FIGURE 7

8/11

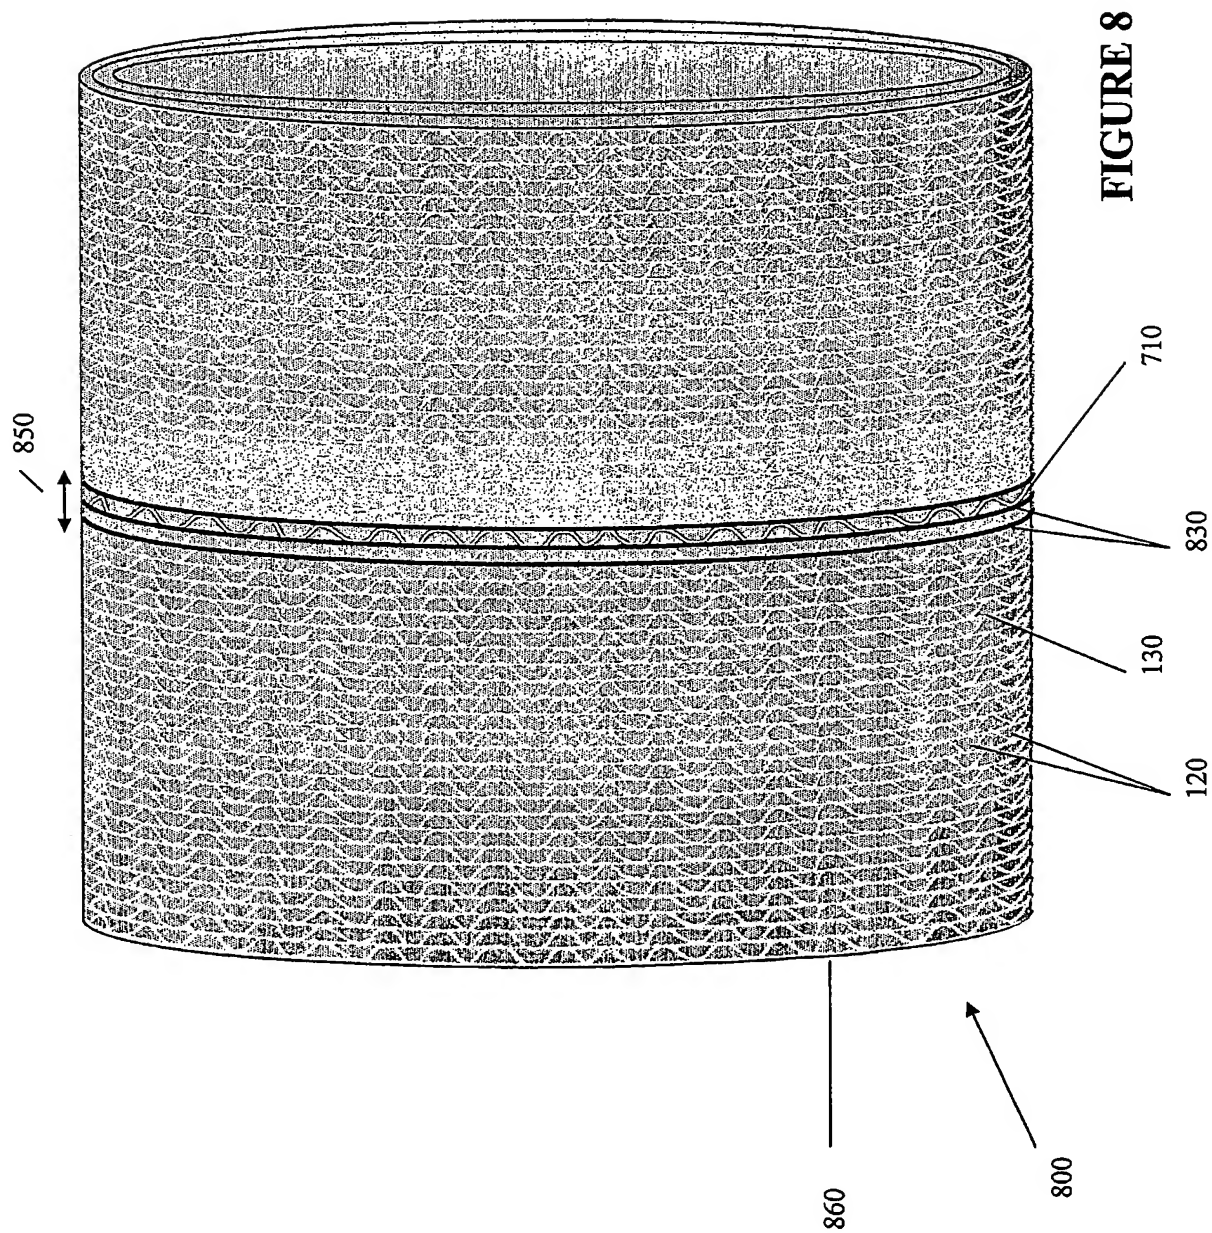

9/11

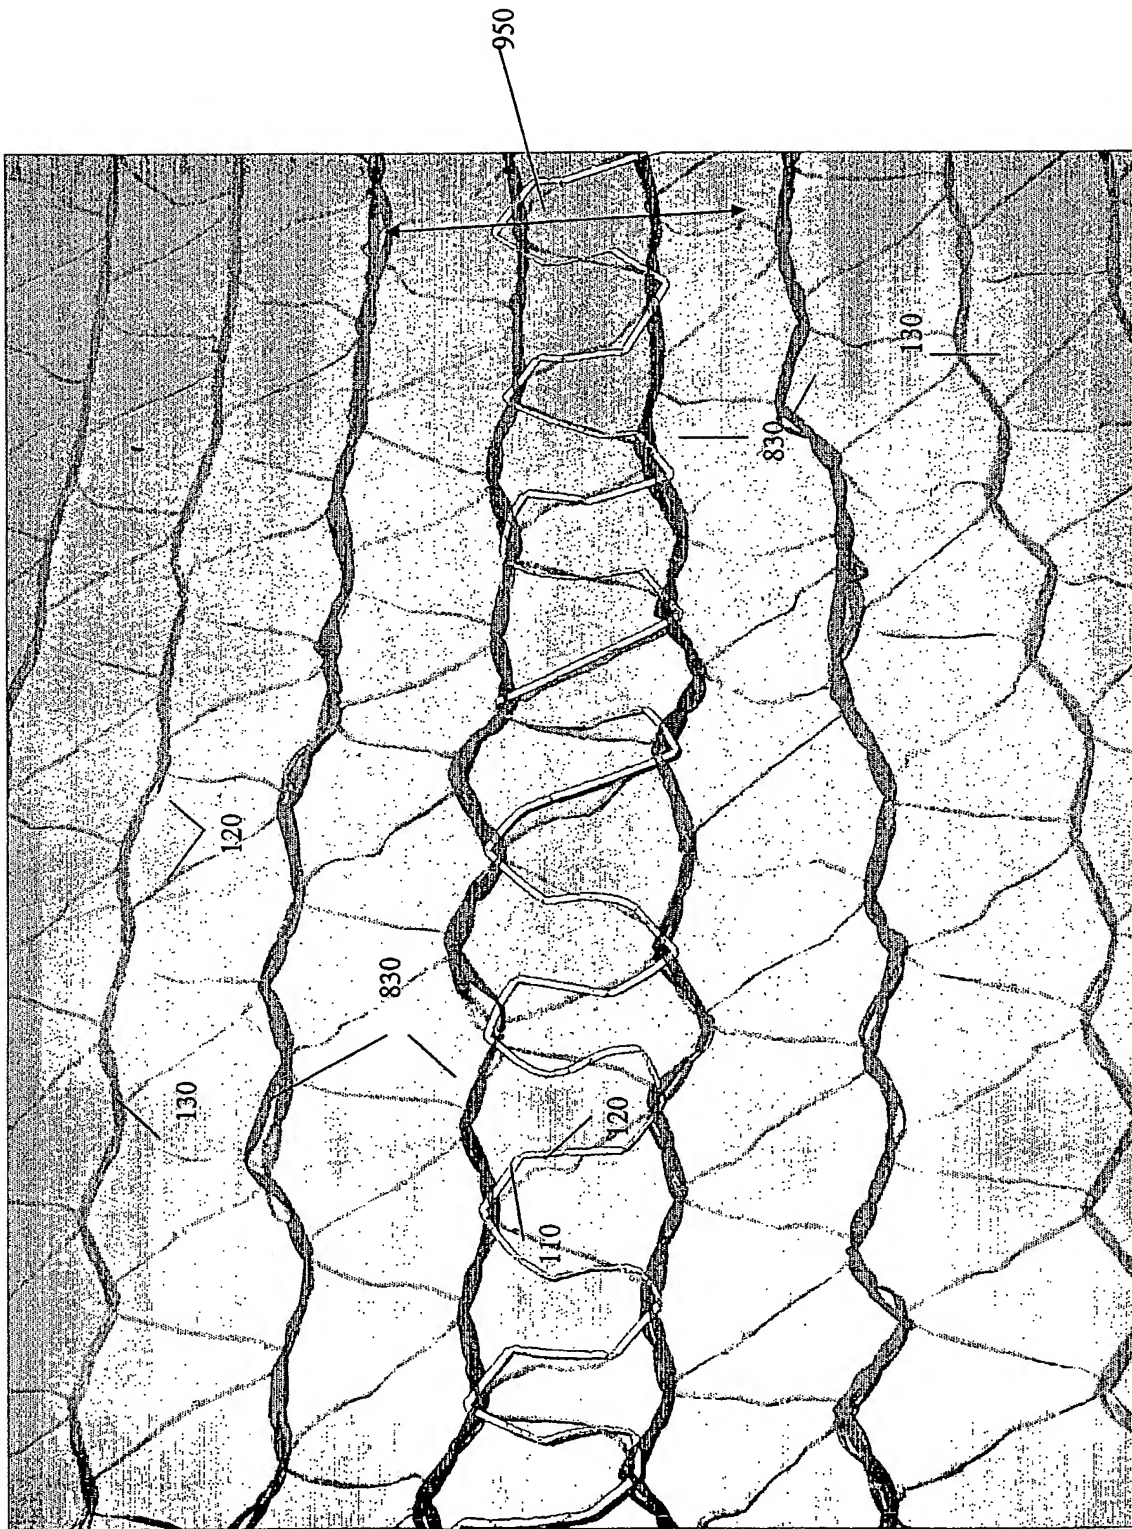


FIGURE 9

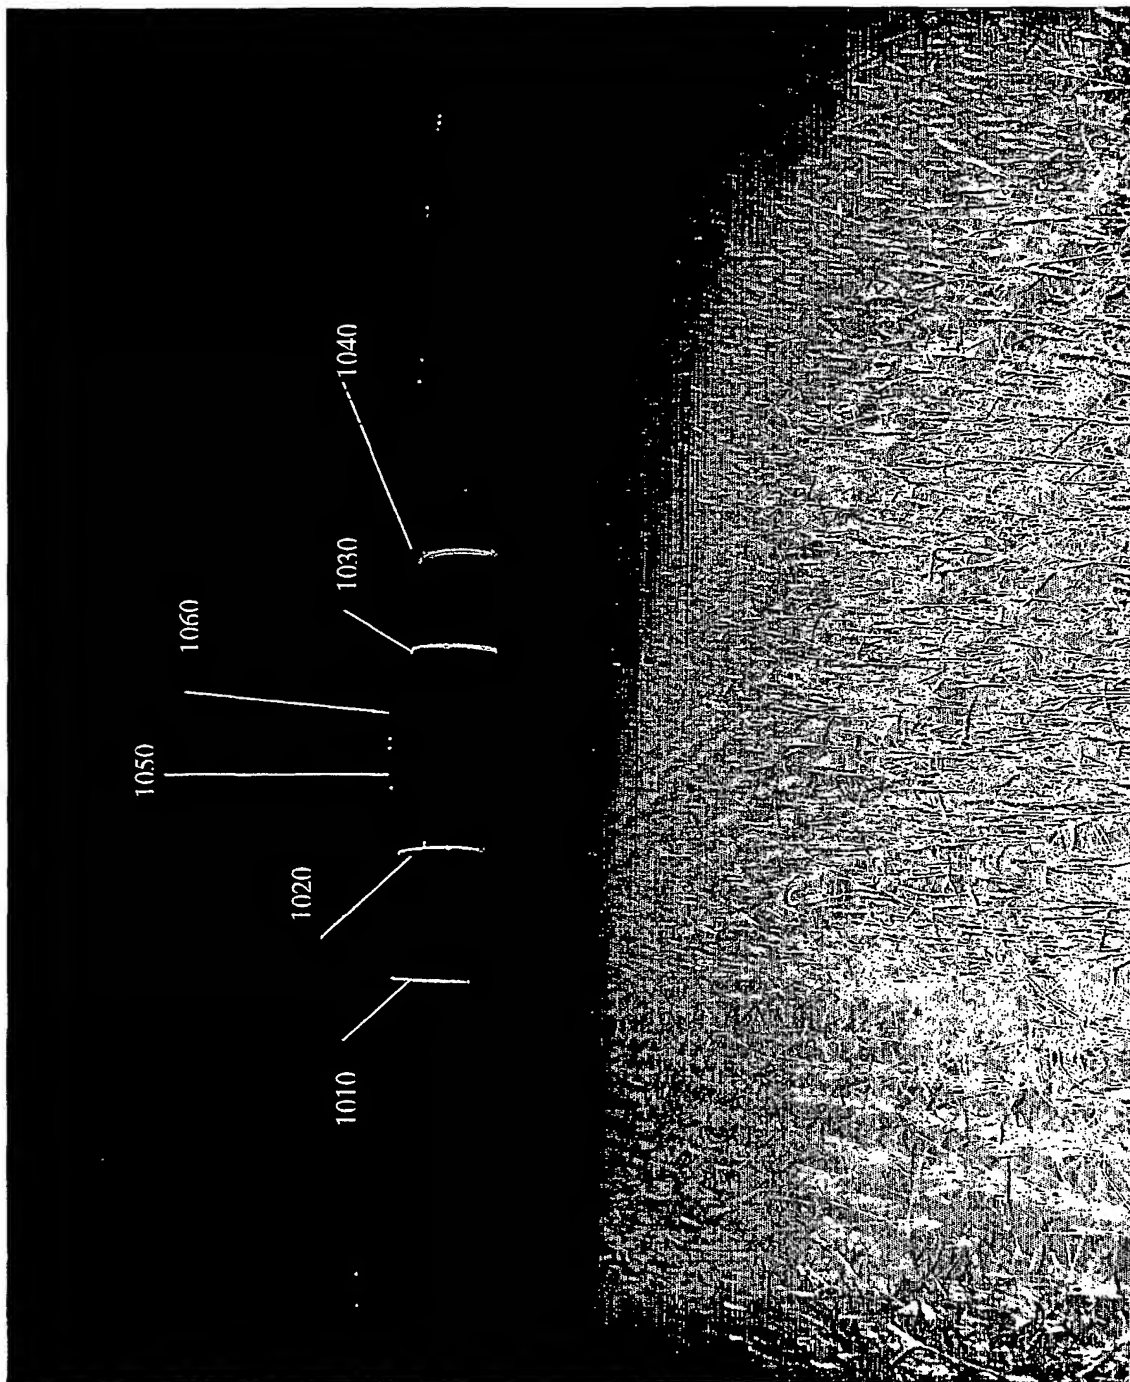


FIGURE 10

10/516830

INTERNATIONAL SEARCH REPORT

Intern: al Application No

REC PTO 07 DEC 2005 PCT/IB2004/002908

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 D04B21/16 A01F15/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC 7 A01F D04B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 578 353 A (TAMA PLASTIC INDUSTRY) 12 January 1994 (1994-01-12) column 1, line 1 - line 27 column 3, line 19 - line 34; claim 1; figure 1	1-69
A	US 6 521 551 B1 (MASS NISSIM ET AL) 18 February 2003 (2003-02-18) cited in the application column 1, line 13 - line 39; figure 1 column 2, line 66 - column 3, line 18; claim 1; figures 2,3a,3b,7	1-69
A	WO 01/16223 A (VISIBILITY ENHANCEMENT TECHNOLOGIES) 8 March 2001 (2001-03-08) page 1, line 3 - line 5 page 1, line 12 - line 14 page 10, line 18 - page 11, line 4	1-69
-/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents: *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family		
Date of the actual completion of the international search 19 April 2005		Date of mailing of the international search report 11/05/2005
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Uhlig, R

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2004/002908

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 497 507 A (ROHM AND HAAS COMPANY) 5 August 1992 (1992-08-05) page 1, line 8 - line 12 -----	1-69
A	US 4 570 789 A (FRITZ ET AL) 18 February 1986 (1986-02-18) column 2, line 53 - line 65; figures -----	1-69
A	DE 78 08 280 U1 (POLYDRESS PLASTIC GMBH, 6120 MICHELSTADT) 29 June 1978 (1978-06-29) -----	1,19,49, 58,63, 66,69
A	WO 96/10107 A (POLYSACK PLASTIC INDUSTRIES NIR ITZHAK-SUFA; MCINNIS, PATRICIA, G; FRY) 4 April 1996 (1996-04-04) -----	
A	DE 37 22 411 A1 (VEB VEREINIGTE NETZ- UND SEILWERKE HEIDENAU) 17 March 1988 (1988-03-17) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/IB2004/002908

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0578353	A	12-01-1994	AU 3719393 A	20-01-1994
			CA 2095296 A1	10-01-1994
			DE 69322003 D1	17-12-1998
			DE 69322003 T2	29-04-1999
			EP 0578353 A1	12-01-1994
			ES 2125949 T3	16-03-1999
			NZ 247432 A	26-10-1994
			US 5664306 A	09-09-1997
US 6521551	B1	18-02-2003	US 2001004572 A1	21-06-2001
			AT 248243 T	15-09-2003
			AU 743282 B2	24-01-2002
			AU 8962398 A	17-06-1999
			BR 9804478 A	18-09-2001
			CA 2251235 A1	25-05-1999
			DE 69817510 D1	02-10-2003
			DE 69817510 T2	17-06-2004
			DK 919655 T3	24-11-2003
			EP 1371768 A1	17-12-2003
			EP 1369516 A1	10-12-2003
			EP 0919655 A2	02-06-1999
			ES 2202761 T3	01-04-2004
			JP 11315453 A	16-11-1999
			NO 984998 A	26-05-1999
			NZ 332595 A	28-07-2000
			PT 919655 T	31-12-2003
			ZA 9810074 A	31-05-1999
WO 0116223	A	08-03-2001	AU 7347600 A	26-03-2001
			WO 0116223 A1	08-03-2001
EP 0497507	A	05-08-1992	US 5135568 A	04-08-1992
			AU 656165 B2	27-01-1995
			AU 1058592 A	06-08-1992
			BR 9200284 A	06-10-1992
			CA 2059489 A1	31-07-1992
			EP 0497507 A2	05-08-1992
			FI 920399 A	31-07-1992
			JP 5078603 A	30-03-1993
			MX 9200362 A1	01-07-1992
			NO 920303 A	31-07-1992
			NZ 241443 A	26-08-1994
US 4570789	A	18-02-1986	DE 8311900 U1	06-10-1983
			AU 562720 B2	18-06-1987
			AU 2707584 A	25-10-1984
			DE 3461982 D1	19-02-1987
			DK 199384 A ,B,	23-10-1984
			EP 0126278 A1	28-11-1984
			ZA 8403017 A	29-10-1986
DE 7808280	U1	29-06-1978	BE 874437 A1	18-06-1979
			FR 2419693 A1	12-10-1979
			NL 7902047 A	20-09-1979
			YU 60579 A1	30-06-1982
WO 9610107	A	04-04-1996	WO 9610107 A1	04-04-1996
			AU 7958794 A	19-04-1996

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/IB2004/002908

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9610107	A		DE 69412276 D1	10-09-1998
			DE 69412276 T2	11-03-1999
			DK 723606 T3	03-05-1999
			EP 0723606 A1	31-07-1996
			HK 1006501 A1	17-03-2000
			JP 9506781 T	08-07-1997
<hr/>				
DE 3722411	A1	17-03-1988	DD 260819 A3	12-10-1988
			FR 2603449 A1	11-03-1988
<hr/>				

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.